


# Equipment

The standard and optional equipment varies from country to country. For more information, please contact with us.

| Engine                               |   | Cab                               |   |
|--------------------------------------|---|-----------------------------------|---|
| Oil filter                           | ● | AM/FM radio                       | ● |
| Fuel filter                          | ● | Cup holder                        | ● |
| Oil-water separator                  | ● | Suspension seat                   | ● |
| Air filter                           | ● | Heating system                    | ● |
| Radiator                             | ● | Engine safety start system        | ● |
| Alternator                           | ● | Safety belt                       | ● |
| Auxiliary water tank                 | ● | FOPS/TOPS cab                     | ● |
| Electronic fuel feed pump            | ● | FOPS/TOPS Canopy                  | ○ |
| Muffler                              | ● | Windscreen washer and wiper       | ● |
| Hydraulic system                     |   | Left/right rearview mirror        | ● |
| Hydraulic pilot control rod          | ● | Lighter                           | ● |
| Slewing parking brake system         | ● | Safety device of front windscreen | ○ |
| Traveling parking brake system       | ● | Front working devices             |   |
| Dual-speed traveling system          | ● | 300 mm bucket                     | ○ |
| Auto traveling gear shifting system  | ● | 485mm bucket                      | ○ |
| Electro-hydraulic proportional lever | ○ | 580 mm bucket                     | ● |
| Light                                |   | 1000 mm bucket                    | ○ |
| Boom light                           | ● | Breaker pipeling                  | ● |
| Superstructure light                 | ● | Auxiliary pipeling                | ● |
| Front cab light                      | ● | Hydraulic quick hitch pipeline    | ● |
| Warning light                        | ● | Track                             |   |
|                                      |   | 300mm rubber track                | ● |
|                                      |   | 300mm steel track                 | ○ |


● Standard equipment   ○ Optional equipment

| SWE25UF Technical Parameters |                                   |                                    |                 |
|------------------------------|-----------------------------------|------------------------------------|-----------------|
| Type of cab                  |                                   | cabin/canopy                       |                 |
| Bucket capacity,std.         |                                   | m³                                 | 0.08            |
| Bucket width                 |                                   | mm                                 | 580             |
| Machine weight               |                                   | kg                                 | 2650/2550       |
| Dimensions                   | Overall length                    | mm                                 | 4140            |
|                              | Overall height                    | mm                                 | 2455            |
|                              | Overall width                     | mm                                 | 1500            |
|                              | Ground clearance                  | mm                                 | 310             |
| Engine                       | Brand                             | Yanmar                             |                 |
|                              | Model                             | 3TNV80F-SPSU                       |                 |
|                              | Displacement                      | L                                  | 1.267           |
| Working ranges               | Output                            | kW/rpm                             | 14.6/2400       |
|                              | Max cutting height                | mm                                 | 4355            |
|                              | Max loading height                | mm                                 | 3010            |
|                              | Max digging depth                 | mm                                 | 2840            |
|                              | Max vertical wall digging depth   | mm                                 | 2580            |
|                              | Max digging reach                 | mm                                 | 4775            |
|                              | Boom swing angle ( left/right )   | °                                  | 65/50           |
|                              | Front swing radius                | mm                                 | 1980            |
|                              | Tail swing radius                 | mm                                 | 765             |
|                              | Max digging force ( Arm )         | kN                                 | 14              |
| Track                        | Max digging force ( Bucket )      | kN                                 | 24              |
|                              | Type                              | Rubber crawler                     |                 |
|                              | Track Width                       | mm                                 | 300             |
| Undercarriage                | Track Length                      | mm                                 | 1990            |
|                              | Length to center of Rollers       | mm                                 | 1560            |
|                              | Lenhth to center of track         | mm                                 | 1200            |
|                              | Travelling speed(High/Low)        | km/h                               | 4.1/2.3         |
|                              | Gradeability                      | deg                                | 30              |
| Swing speed                  |                                   | rpm                                | 8.8             |
| Ground pressure              |                                   | kpa                                | 25.1            |
| Dozer size                   | Width                             | mm                                 | 1500            |
|                              | Height                            | mm                                 | 325             |
| Hydraulic pumps              | Lifting capacity ( Height/Depth ) | mm                                 | 330/320         |
|                              | Type                              | 2 variable plunger pump,1Gear pump |                 |
|                              | Displacement                      | L/min                              | 2*28.8+19.2+6.5 |
|                              | Hydraulic pressure                | Mpa                                | 2*21.5+18       |
| Fuel tank capacity           |                                   | L                                  | 26              |
| Hydraulic oil tank capacity  |                                   | L                                  | 24              |

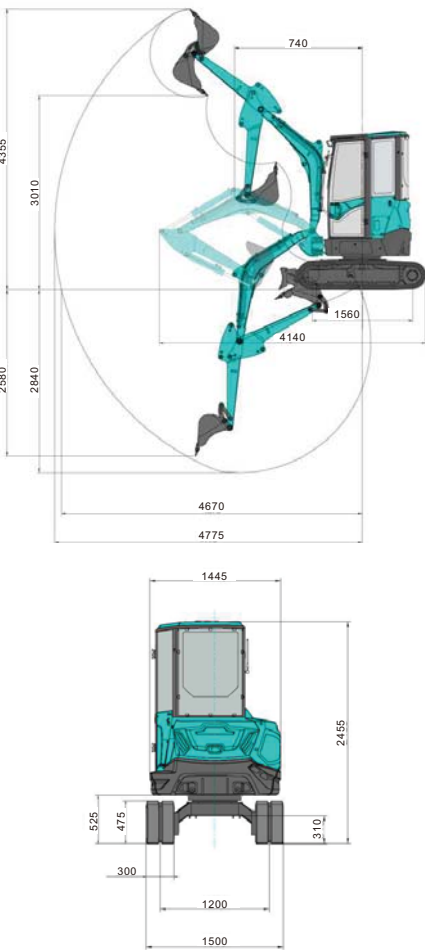

## Load Capacity:

| Lift Point Height | Lift Point Radius(MAX) |               | Lift Point Radius(3.0m) |               | Lift Point Radius(2.0m) |               |
|-------------------|------------------------|---------------|-------------------------|---------------|-------------------------|---------------|
|                   | Over-front(kg)         | Over-side(kg) | Over-front(kg)          | Over-side(kg) | Over-front(kg)          | Over-side(kg) |
| 3.0m              | 469.00*                | 404.3         | 469.00*                 | 404.30        | -                       | -             |
| 1.5m              | 540.80*                | 288.8         | 572.60*                 | 420.80        | -                       | -             |
| 0m                | 612.60*                | 176.4         | 813.60*                 | 358.90        | 1292.20*                | 598.20        |
| —1.0m             | 679.60*                | 363.1         | 679.60*                 | 375.4         | 1005.00*                | 573.50        |

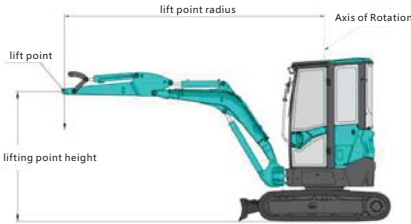

Notes :  
1、 Load with \* is limited by hydraulic capacity and based on ISO 10567. Rated loads do not exceed 87% of hydraulic capacity.  
2、 Load without \* is limited by tipping load and based on ISO 10567. Rated loads do not exceed 75% of tipping capacity.  
3、 The excavator bucket, hook, sling and other lifting accessories are not included in this table.